



INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

REC'D 21 JUL 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

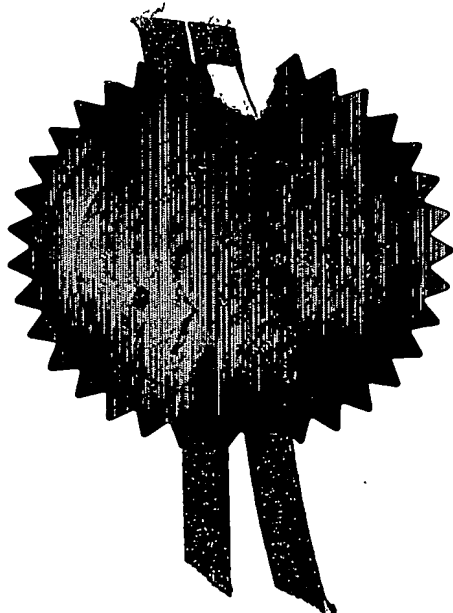

Signed


Dated

14 July 2004

Best Available Copy

**PRIORITY  
 DOCUMENT**


SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)



30 JUN 03 18885-1 002877  
F01/77002.00-0315223.8

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

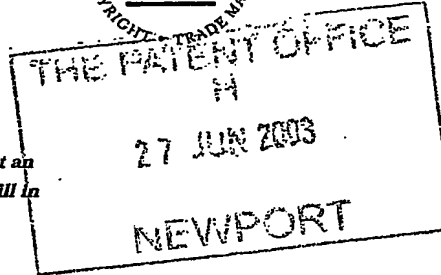

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

HL83031/000/JC

27 JUN 2003

2. Patent application number

(The Patent Office will fill in this part)

0315223.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

HYDRO INTERNATIONAL PLC  
Shearwater House, Clevedon Hall Estate  
Victoria Road, Clevedon, BS21 7RD

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

68 68541 001

4. Title of the invention

HYDRODYNAMIC TREATMENT DEVICE

5. Name of your agent (if you have one)

Haseltine Lake

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Imperial House  
15-19 Kingsway  
London  
WC2B 6UD

Patents ADP number (if you know it)

34001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 11 ✓

Claim(s) 5 ✓

Abstract 1 ✓

Drawing(s) 3 ✓ *3 June*

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11.

I/We request the grant of a patent on the basis of this application.

*Handwritten signature*  
Signature

Date

27 June 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr J R A M Cheyne

[0117] 910 3200

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

HYDRODYNAMIC TREATMENT DEVICE

This invention relates to a hydrodynamic treatment device for separating material from a liquid flow which carries the material.

5       The material to be separated may be settleable solids such as grit, sediments and fine particulates, or liquids having a lower density than the main liquid flow (which may be oils and hydrocarbons if the main liquid is water), or gross solids that may be neutrally  
10       buoyant, such as street debris including bottles, crisp packets, cigarette ends, leaves, etc.

Hydrodynamic treatment vessels or vortex separators are well known and are based on initial

---

15       ~~research work carried out in the 1950's and 1960's~~  
(Design, Construction and performance of vortex overflows, Bernard Smisson, Symposium on Storm Sewage Overflows, Institution of Civil Engineers, 1967, pages 99-110). They have found application as combined sewer overflows (CSOs) and as grit separators.

20       Separators known as "Hydro-Dynamic" separators are low energy devices which operate by causing a liquid containing suspended solid material to rotate in a cylindrical vessel so that the solid material falls under gravity and inertial forces to the base and once  
25       there is swept to a central lower outlet by an inward sweeping effect caused by complex flow patterns in the device. It is known that the device is suitable for providing enhanced settlement of solids material from a liquid/solid mixture. Thus, such devices have been  
30       used in sewage treatment for separating hard grit from the incoming raw sewage, with the resultant degrittied sewage then being passed to a conventional sewage

treatment plant. They are also used as "storm water overflows" upstream of conventional sewage treatment works to ensure that gross contamination is separated from liquid waste discharged to watercourses during storm conditions when the sewage treatment works is unable to cope with the high flow. "Hydro-Dynamic" separators of this type are described and claimed in, for instance, our British Patent Specifications Nos. 2082941 (corresponding to US Patent No. 4451366) and 2158741 (corresponding to US Patent No. 4747962).

The known hydro-dynamic separator is a simple device with no moving parts. The simple geometry of the device however, hides an internal complexity of ~~flow structure. The mean flow pattern observed is a~~ downward helical flow in the outer region and an upward helical flow near the central region of the separator. These two spiral flow regimes are separated by a shear zone region. The combination of underflow and overflow leads to a non-uniform axial flow profile. The effects of fluid viscosity, boundary layers and momentum transfer between adjacent zones of flow moving at different velocities, cause velocity gradients and vorticity (rotation) to be present. These result in a secondary flow, superimposed on the primary flow, which in turn results in solids being swept towards a lower outlet, and thence to a solids collection trough or hopper. The hydraulic regime in the separator ensures very little short-circuiting with a near plug-flow type flow regime.

The effectiveness of a hydrodynamic separator can be expressed quantitatively in terms of removal efficiency and retention efficiency. Removal

efficiency represents the percentage of particles in the incoming flow which are removed from within the separator. Retention efficiency represents the percentage of particles or other contaminants in the incoming flow which are retained within the device and do not reach the clean water outlet. Both the removal efficiency and retention efficiency will vary according to the characteristics of particle concerned, such as its size, density and shape, but the objective is to maximise the percentage of particles either removed from the flow or retained within the treatment device, particularly for smaller particle sizes, such as those below 400 microns.

---

~~Optimising the performance of hydrodynamic~~  
separators is extremely difficult. Small changes in geometry can have major effects on removal and retention efficiencies, and consequently the optimisation process requires the construction of many prototypes. This is both expensive and time consuming, and does not lead to a guaranteed improvement in performance.

Computational fluid dynamics enables computer modelling of treatment vessels, and of the flow regimes which are created within them. However, the complex nature of the flow and, as mentioned above, the effect on performance of small changes in geometry mean that even computational fluid dynamics is not completely reliable in optimising the performance of hydrodynamic treatment devices in a practical environment.

A development of the separators disclosed in GB 2082941 and GB 2158741 is disclosed in WO00/62888. The separator disclosed in that document comprises a

cylindrical vessel containing a hollow column which terminates at its lower end at a downwardly diverging conical member. Shortly above the conical member, the hollow column has openings which permit flow from the main body of the vessel into the column. There is an outlet for such flow at the top of the column.

A dip plate surrounds the column, and acts to stabilise flow patterns within the vessel. In operation, flow can take place around the dip plate to the openings in the column, and thence up the column to the outlet.

The present invention arises from a desire to increase the removal and retention efficiencies of

---

separators of the type disclosed in GB 2082941, GB 2158741 and WO00/62888.

According to the present invention there is provided a hydrodynamic treatment device for separating material from a liquid flow, the device comprising a vessel having a cylindrical outer wall and an inner partition which divides the interior of the vessel into outer and inner separation regions which communicate with each other across the inner partition, the vessel having an inlet which is directed into one of the inner and outer regions to promote a rotating flow in the vessel, a liquid outlet which extends from the other of the inner and outer regions, and a frustoconical base which converges downwardly to an outlet opening for separated material, the inner separation region being closed at its lower end.

One result of adopting the features of the present invention is that flow patterns established in the inner separation region are not propagated through the

outlet opening to a separated material collection region. In known devices, such flow patterns can stir up collected material, and cause it to migrate back through the outlet opening to rejoin the main flow.

5 Preferred embodiments constructed in accordance with the present invention demonstrate excellent removal and retention efficiencies.

In a preferred embodiment, the inlet opens into the outer separation region and the outlet opens into  
10 the inner separation region, although the reverse arrangement is possible.

The inner separation region may be annular, with its inner periphery defined by a central cylindrical

~~partition, the interior of which is open at its lower~~  
15 end to provide access to the outlet opening.

Communication between the outer and inner separation regions may be provided by means of at least one aperture in the inner partition. The or each aperture may be disposed adjacent the lower end of the  
20 inner partition.

A screen may be provided over the or each aperture. In one embodiment, the aperture may comprise a circumferential slot extending entirely around the inner partition.

25 A frusto-conical downwardly extending wall may be provided at the lower end of the inner separation region. The inner partition may abut the frusto-conical wall, so that the frusto-conical wall serves to close the lower end of the inner separation region. The  
30 frusto-conical wall preferably projects beyond the inner partition, the outer edge of the frusto-conical wall being spaced from the frusto-conical base of the



vessel, so as to define a gap providing communication between the interior of the vessel and the outlet opening.

5 The inner partition may be cylindrical, and may be coaxial with the outer wall.

In a preferred embodiment, an outlet duct extends from the inner separation region through the cylindrical outer wall of the vessel. An inlet duct  
~~may be provided to conduct flow to the inlet, and this~~  
10 inlet duct may extend through the cylindrical outer wall. The inlet and outlet ducts may be aligned with one another and may be provided in an upper region of the vessel. Alternatively, the inlet may be supplied  
~~with inflowing liquid from an overhead grating, for~~

15 example situated to receive run-off from a road surface.

The inlet may be in the form of an inlet port which communicates with the inlet duct, which is situated below the inlet duct, and which opens in a  
20 generally tangential direction with respect to the axis of the vessel. The inlet duct may also communicate directly with the inner separation region, for example over a weir having a top edge above the inlet port, or other bypass facility such as a siphon.

25 The inner separation region may contain filter media and, in a preferred embodiment, the filter media substantially fills the inner separation region. The filter media may be in the form of a replaceable cartridge.

30 For a better understanding of the present invention, and to show more clearly how it may be

carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 shows a hydrodynamic treatment device with part omitted for clarity;

5        Figure 2 is a sectional view of the treatment device of Figure 1; and

Figure 3 corresponds to Figure 1 but shows a modified device.

The treatment device of Figure 1 comprises a  
10       vessel 2 defined by a cylindrical outer wall 4. An inlet duct 6 and an outlet duct 8 extend through the wall 4 and are aligned with each other. Within the vessel 2, the inlet duct 6 emerges into a chamber or  
~~trough 10. The base of the trough 10 opens into an~~  
15       inlet shute 12 which is situated adjacent the inner face of the wall 4. The shute 12 has an inlet port 14 in the form of an opening directed generally tangentially of the wall 4 for admitting flow to the interior of the vessel 2. The inlet port 14 is  
20       disposed below the trough 10 and the inlet duct 6.

At the lower end of the vessel, there is a downwardly convergent frusto-conical base 16 which extends from the wall 4 to a outlet opening 18 for separated material, which provides access to a sump  
25       for collection of the material.

An inner partition 24 is situated within the vessel 2. In the embodiment illustrated, the inner partition 24 is cylindrical and is coaxial with the wall 4. However, in other embodiments the inner  
30       partition 24 may have a different shape and disposition. The partition 24 divides the interior of the vessel 2 into an outer separation region 22 and an

inner separation region 28. The inner separation region 28 is annular, with its inner periphery defined by a central cylindrical partition 26.

The partitions 24, 26 defining the inner  
5 separation region 28 extend, in the embodiment shown in Figure 1, for almost the full height of the vessel 2. At their upper ends, they extend above the inlet and outlet ducts 6, 8, and at their lower ends they extend to the level of the frusto-conical base 16, although  
10 they may terminate short of this position. The central cylindrical partition 26 is continuous, i.e. it contains no apertures or perforations.

The central cylindrical partition 26 is provided  
~~at its lower end with a downwardly divergent frusto-~~  
15 conical wall 30. The inner partition 24 abuts the frusto-conical wall 30, and it will be appreciated from Figure 2 that the frusto-conical wall 30 thus closes the lower end of the inner separation region 28.

The frusto-conical wall 30 extends outwardly  
20 beyond the inner partition 24 and stops short of the frusto-conical base 16. An annular gap 32 is thus left between the frusto-conical base 16 and the frusto-conical wall 30 to provide communication with the outer separation region 22 and the outlet opening 18.

25 Apertures 34 are provided in the inner partition 24 adjacent its lower end. In the embodiment shown, there are four such apertures distributed equally around the inner partition 24. The apertures 34 may be provided with screens such as mesh screens. In  
30 alternative embodiments, the apertures may be replaced by a single slot extending circumferentially around the inner partition 24, or defined by a gap between the

lower edge of the inner partition 24 and the frusto-conical wall 30. Such a slot may also be provided with a screen.

5 The outlet duct 8 opens at the inner partition 24 to permit flow from the inner separation region 28 into the outlet duct 8.

In operation, incoming flow, for example water containing contaminants to be separated, such as settleable solids material and floatable material,  
10 enters the vessel 2 by way of the inlet duct 6. The flow passes through the trough 10 into the chute 12 and thence through the inlet 14 to establish a rotating flow within the vessel. Complex flow patterns are set  
~~up within the liquid within the vessel, and this~~

15 enables solids and other settleable material to settle and eventually to pass through the gap 32 and the outlet opening 18 into the sump 20. Floatable material, such as oil and hydrocarbons as well as solids with a density lower than water, will similarly  
20 be separated from the flow and will rise within the vessel to accumulate in the upper region 36.

Clean water, ie water from which most settleable solids and floatable materials have been separated, will pass through the apertures 34 into the inner  
25 separation region 28. If screens are provided over the apertures 34, these will provide additional removal of solids before the flow enters the inner separation region 28. Additional settling may occur within the inner separation region 28. Solid material settling in  
30 this region will accumulate on the wall 30 and possibly pass back through the apertures 34 to migrate to the outlet opening 18.

Liquid flow from the inner separation region will then pass through the outlet duct 8 for discharge or further treatment. Floatable materials collected in the region 36 can be removed periodically, as can  
5 settled material accumulated in the sump 20. It will be appreciated that access to the sump 20 can be achieved through the interior of the central cylindrical wall 26 and through the outlet opening 18.

Filter media (not shown) may be provided in the  
10 inner separation region 28. This filter media may substantially fill the region 28 and will serve to extract further solids from the flow before it reaches the outlet duct 8. For ease of maintenance, the filter

~~media may be in the form of, or contained in, a~~  
15 cartridge so that periodic replacement is simplified.

In the event of heavy flow, in excess of that which can pass through the shute 12 and the inlet port 14, the level in the trough 10 will rise. The trough is bounded at its end away from the inlet duct 6 by a  
20 weir 38, the top edge of which is substantially above the inlet 14. When the level in the trough 10 reaches the top edge of the weir 38, flow will bypass the inlet 14 and pass over the weir 38 directly to the inner separation region 28 and thence to the outlet duct 8.

25 It will be appreciated that rapidly settling solids will tend to move along the lower region of the trough 10 and so will not flow over the weir 38 but instead will pass into the vessel 2 through the inlet 14. Some solids which pass over the weir 38 will have a settling  
30 rate in excess of the upflow rate of liquid in the inner separation region 28 and will fall to the bottom

of the inner separation region 28 to emerge from the apertures 34 into the main flow in the vessel 2.

Figure 3 shows a modified device in which there are no apertures 34. Instead, the inner partition 24 comprises an upper, continuous, portion 40 and a lower perforated portion 42. The portion 42 may comprise a cylinder of screening material, such as mesh, secured between the upper portion 40 and the frusto-conical wall 30. Alternatively, the portion 42 may be omitted, so that access to the inner separation region 28 is achieved by way of a circumferential slot between the portion 40 and the frusto-conical wall 30, or between two spaced apart continuous portions of the inner partition 24.

---

CLAIMS

1. A hydrodynamic treatment device for separating material from a liquid flow, the device comprising  
5 a vessel having a cylindrical outer wall and an inner partition which divides the interior of the vessel into outer and inner separation regions which communicate with each other across the inner partition, the vessel having an inlet which is  
10 directed into one of the inner and outer regions to promote a rotating flow in the vessel, a liquid outlet which extends from the other of the inner and outer regions, and a frustoconical base which  
~~converges downwardly to an outlet opening for~~  
15 separated material, the inner separation region being closed at its lower end.
2. A hydrodynamic treatment device as claimed in claim 1, in which the inlet opens into the outer  
20 separation region and the outlet opens into the inner separation region.
3. A hydrodynamic treatment device as claimed in claim 1 or 2, in which the inner separation region  
25 is annular, and is defined at its inner periphery by a central cylindrical partition, the interior of which is open at its lower end to provide access to the outlet opening.
- 30 4. A hydrodynamic treatment device as claimed in any one of claims 1 to 3, in which the inner separation region communicates with the outer

separation region through at least one aperture formed in the inner partition.

5. A hydrodynamic treatment device as claimed in  
5 claim 4, in which the or each aperture is disposed adjacent the lower end of the inner partition.
6. A hydrodynamic treatment device as claimed in  
10 claim 4 or 5, in which the aperture comprises a circumferentially extending slot in the inner partition.
7. A hydrodynamic treatment device as claimed in  
~~claim 4 or 5, in which the aperture comprises a~~  
15 circumferential gap between the inner partition and a wall closing the lower end of the inner separation region.
8. A hydrodynamic treatment device as claimed in any  
20 one of claims 4 to 7, in which the or each aperture is provided with a screen.
9. A hydrodynamic treatment device as claimed in any  
25 one of the preceding claims, in which the inner separation region is closed at its lower end by a wall.
10. A hydrodynamic treatment device as claimed in  
30 claim 9, in which the wall is frusto-conical and diverges in the downwards direction.



11. A hydrodynamic treatment device as claimed in claim 10, in which the frusto-conical wall projects beyond the inner partition.
- 5 12. A hydrodynamic treatment device as claimed in any one of claims 9 to 11, in which the wall terminates short of the frusto-conical base of the vessel, thereby defining an annular gap between the frusto-conical base and the wall.
- 10 13. A hydrodynamic treatment device as claimed in any one of the preceding claims, in which a filter media is provided in the inner separation region.
- 
- 15 14. A hydrodynamic treatment device as claimed in claim 13, in which the filter media substantially fills the inner separation region.
- 20 15. A hydrodynamic treatment device as claimed in claim 13 or 14, in which the filter media comprises a replaceable cartridge.
- 25 16. A hydrodynamic treatment device as claimed in any one of the preceding claims, in which an outlet duct extends from the liquid outlet through the cylindrical outer wall of the vessel.
- 30 17. A hydrodynamic treatment device as claimed in claim 16, in which an inlet duct extends to the inlet of the vessel through the cylindrical outer wall of the vessel, the inlet duct being aligned with the outlet duct.

18. A hydrodynamic treatment device as claimed in claim 17, in which the inlet is disposed below the inlet duct and comprises an inlet port oriented to discharge inlet flow into the vessel in a tangential direction with respect to the axis of the cylindrical outer wall.
19. A hydrodynamic treatment device as claimed in claim 17 or 18, in which the inlet and outlet ducts are disposed at an upper region of the vessel.
- 
20. ~~A hydrodynamic treatment device as claimed any one~~ of claims 17 to 19, in which the inlet duct communicates with the inlet through a chamber, the chamber being provided with bypass means for allowing flow from the chamber to the inner separation region, by passing the outer separation region.
21. A hydrodynamic treatment device as claimed in claim 20, when appendant to claim 18, in which the inlet port is provided in the wall of an inlet shute which extends downwardly from the chamber.
22. A hydrodynamic treatment device as claimed in claim 21, in which the bypass means comprises a weir disposed between the chamber and the inner separation region, the overflow edge of the weir being at a level higher than the inlet port.

23. A hydrodynamic separator as claimed in any one of the preceding claims, in which the inner partition is cylindrical.
- 5 24. A hydrodynamic separator as claimed in any one of the preceding claims, in which the inner partition is coaxial with the outer wall.
- 10 25. A hydrodynamic treatment device substantially as described herein with reference to, and as shown in, the accompanying drawings.
-

**ABSTRACT****HYDRODYNAMIC TREATMENT DEVICE**

A hydrodynamic treatment device comprises a vessel 2  
5 within which is disposed an inner partition 24. The  
inner partition 24 divides the interior of the vessel 2  
into outer and inner regions 22, 28. Flow enters the  
vessel 2 through a tangentially oriented inlet 14 and  
establishes a complex circulating flow within the  
10 vessel 2. Settleable solids migrate to the bottom of  
the vessel 2 and are deposited in a sump 20 through a  
solids outlet opening 18. Flow enters the inner region  
28 through apertures 34 in the inner partition 24, and  
~~is discharged through an outlet duct 8. The inner~~  
15 region 28 is closed at its lower end by a frusto-  
conical, downwardly diverging lower wall 30 which  
projects outwardly from a central cylindrical wall 26.

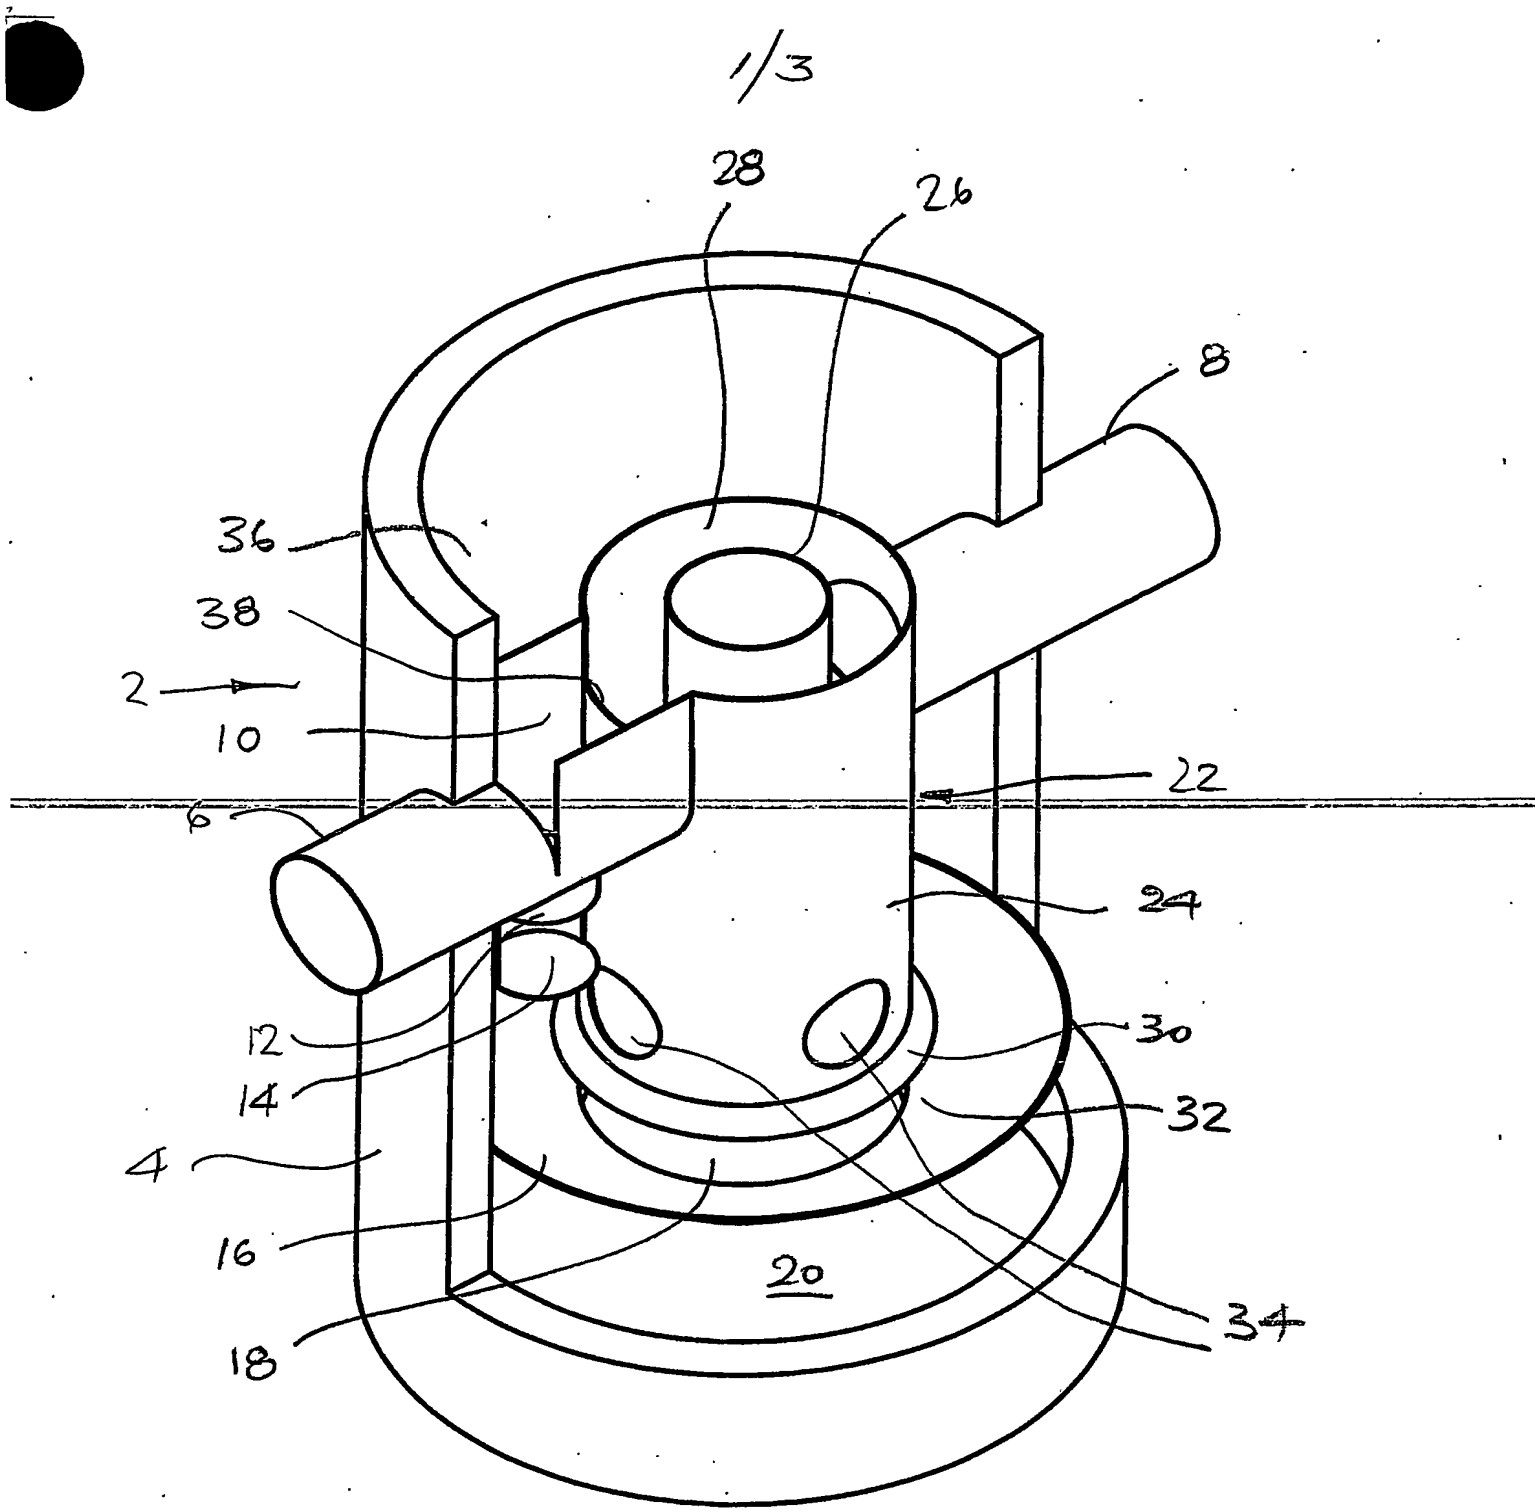


FIG. 1

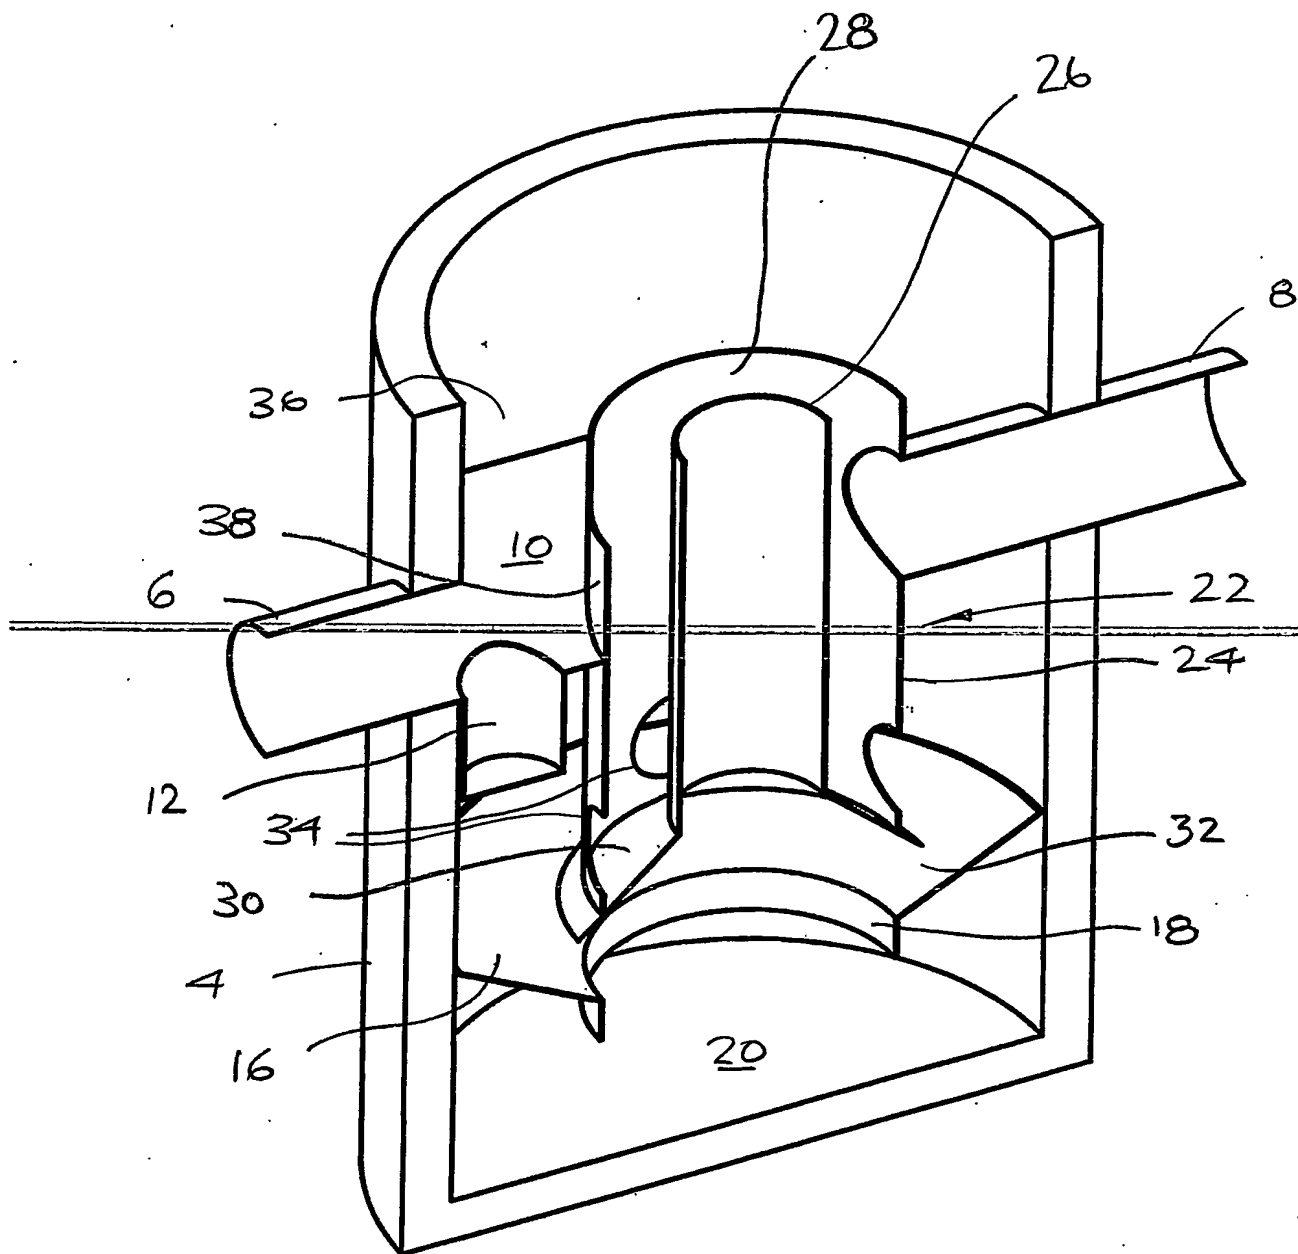
$$2/3$$


FIG. 2

3/3

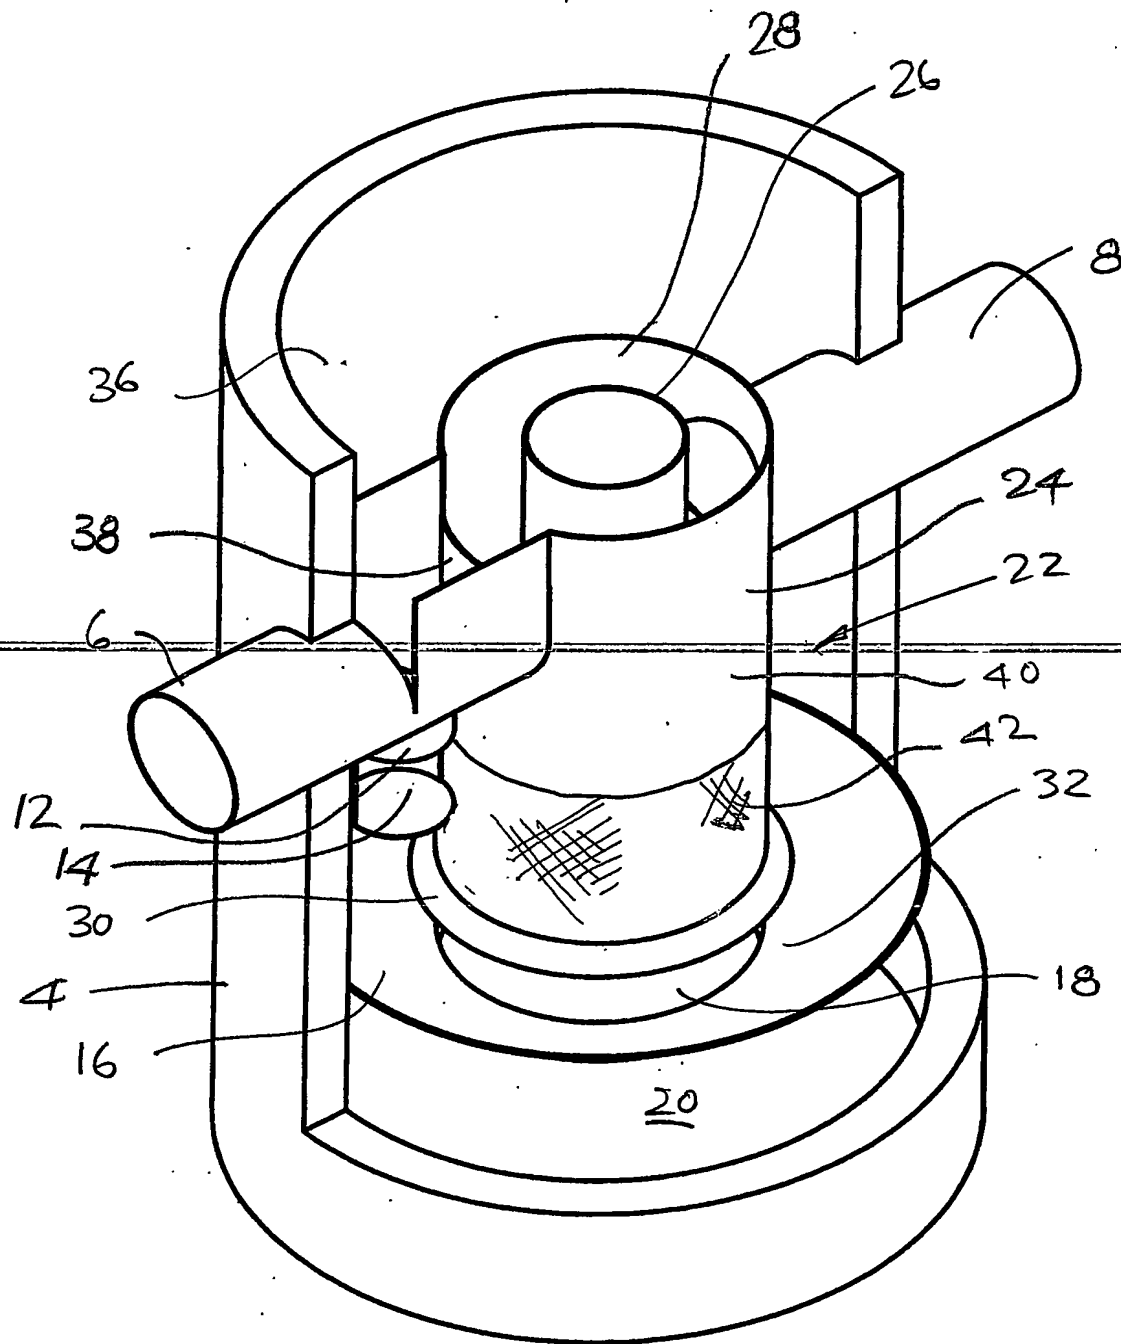


FIG. 3

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**